



Direct from the manufacturer Extruder Parts Auxiliary Machine Air Cooled Die Surface Hot Cutting Pelletizing system

Our Product Introduction

for more products please visit us on extrudergranulator.com

Basic Information

- Place of Origin: Nanjing, China
- Brand Name: HLD/KL
- Certification: CE
- Model Number: Various
- Minimum Order Quantity: 1 set
- Price: Price negotiable
- Packaging Details: Film packaging, bubble film packaging
- Delivery Time: 7 work days
- Payment Terms: L/C, D/A, D/P, T/T, Western Union, MoneyGram
- Supply Ability: 100 sets per month



Product Specification

- Product Name: Air-cooled Die Surface Hot Cutting Pelletizing
- Category: Plastic Granulator
- Number Of Rotating Blades: Customized
- Number Of Fixed Knives: Customized
- Swing Diameter: Customized
- Feed Port Diameter: Customized
- Corrosion Resistance: Yes
- Durability: High
- Cutter Speed: Customized
- Filter Plate Aperture: Customized
- Highlight: **air cooled extruder parts, hot cutting pelletizing system, die surface extruder machine**



More Images



Product Description

Extruder parts - air-cooled die surface hot cutting pelletizing system

The air-cooled die face pelletizing system is a highly efficient pelletizing equipment. Due to its high efficiency and adaptability, it has been widely used in the plastic processing industry, especially in specific applications where it is necessary to avoid contact between materials and water.

Attributes:

The air-cooled die face pelletizing system usually includes a die head, an air-cooled hot-cut pelletizer, an air ring cover, a pelletizing car, a high-pressure fan, a three-stage cyclone, an air delivery pipeline, a vibrating screen, and a finished product silo.

Function:

The system is suitable for two-stage extruders and can handle materials that are not easy to draw and dry, such as PVC, LLDPE, high-filler masterbatch, biodegradable masterbatch, HFFR, WPC, etc.

Feature:

The material avoids contact with water during the pelletizing process and is suitable for materials that are sensitive to moisture.

The pellets are round flakes when they are just cut. Due to the centrifugal force of the cyclone separator, the pellets are mostly cashew-shaped.

The particle diameter and thickness can be adjusted according to customer requirements.

Application:

It is suitable for the production of high-quality plastic pellets, especially those materials that may be damaged during water-cooling or underwater pelletizing.

Since the cooling time on the water tank or conveyor belt is omitted, the output of this pelletizing method is relatively high










Product details



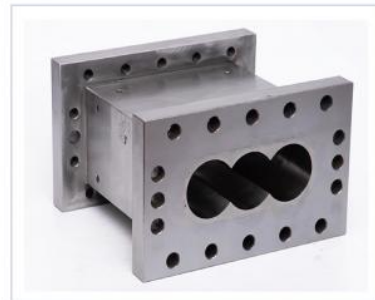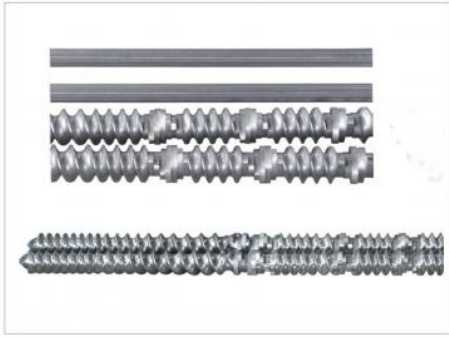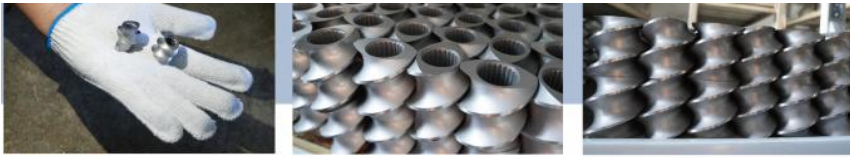

FAQ

1:How many years of experience do you have?

Over 15 years experience in extruder industry.

2:Are you traders or manufacturers?What is the area of the factory?

We are manufacturer,The factory is over 5000 square meters.

3:Screw and barrel accessories, who is produced?

Our factory manufactures it ourselves

4:Can I have a sample order for extruder?

Yes, we welcome sample order to test and check quality. Mixed samples are acceptable.

5:How to proceed an order for ?

Firstly ,let us know your requirements or application.

Secondly ,We quote according to your requirements or our suggestions.

Thirdly ,customer confirms the samples and places deposit for formal order.

Fourthly, We arrange the production.

Finally, arrange delivery

6: Provide technology and formula?


For orders over a certain amount, we will provide the technology and formula to help you complete the project.


7: Have a catalogue?

[HLD Album.pdf](#)

 **Nanjing Henglande Machinery Technology Co., Ltd.**

 +86 15251884557

 jayce@hldextruder.com

 extrudergranulator.com

NO.11,Qinghu Road,Hushu Town,Jiangning District,Nanjing,china.